




Discovery Max **HDMI** IMAX LED Signage

110" / 130" / 165" / 220"

- Front maintenance
- Lightweight design
- Plug and Play
- Ultra-large

Immersive Giant Screen, Created for Commercial Display

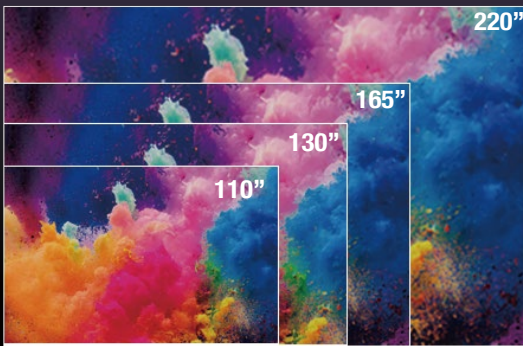

1920 x 1080

3840 x 2160

*Perfect 16:9 aspect ratio for versatile applications

*Effortlessly achieve stunning FHD and UHD large-screen displays

Built-In Integration, Plug and Play

- *Say goodbye to external senders – built-in ASIC control system with HDMI
- *Connect and go: Ideal for commercial displays
- *Supports hot swapping, free switching of display contents



HDMI



110" 45min

220" 45min


45 min Easy Installation

Sleek Design, Easy Installation


- *Dual-direction mounting holes for easy wall attachment
- *Full-size can easily get on the elevator, the perfect LCD alternative
- *Front maintenance and cable-free design for maximum stability



Mobile Stand

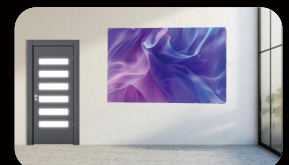

Wall Mounting

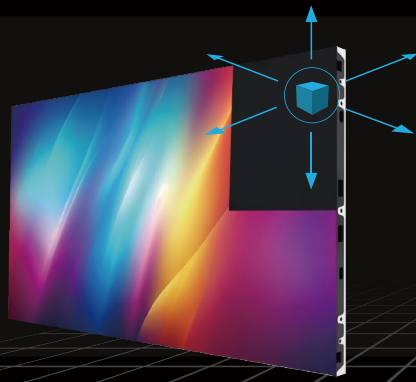

Meticulous Design, Exceptional Quality

- *Large cabinet size for quick and simple installation
- *Die-cast cabinet design ensures high accuracy
- *Three-axis, six-direction adjustable modules for a flawlessly flat display

Ultra-Clear Details for an Immersive Visual Experience

- *Bring reality to life with exceptional clarity on massive screens
- *Cinema-grade visuals: Wide color gamut and high contrast for true-to-life colour



Stable, Reliable, and Durable

- *Optional power backup for enhanced dependability
- *Standard frames and rear mounts included for a complete solution
- 220" supports wall-mounting only

SPECIFICATIONS

Model	M110LEDVA-F	M130LEDVA-F	M165LEDVA-F	M220LEDVA-F
Display Size	110"	130"	165"	220"
Resolution	1920*1080	1920*1080	1920*1080	1920*1080
Aspect Ratio	16:9	16:9	16:9	16:9
Overall Dimensions(W×H×Dmm)	2434×1373.5×39	2890×1630×39	3646×2055.25×39	4858×2737×39
Actual Screen Dimensions(W×Hmm)	2424×1363.5	2880×1620	3636×2045.25	4848×2727
Installation Method	Mobile Stand/Wall Mounting			Wall Mounting
Refresh Rate(Hz)	3840			
Brightness(nits)	750	600	750	800
Gray Scale(Bit)	14			
Contrast Ratio	4000: 1			
Viewing Angle(H./V.)	140°/140°			
Maintenance Method	Front			
Working Voltage	AC: 100 ~ 240 , 50/60			
Power Consumption Max(W/m ²)	1820	2335	3350	5950
Power Consumption Avg(W/m ²)	620	780	1120	1990
Storage Temp(°C)	-20 ~ 60			
Operating Temp(°C)	-10 ~ 50			
Storage Humidity(%RH)	10 ~ 90			
Operating Humidity(%RH)	10 ~ 80			
Weight (Kg)(Screen only)	76	99	171	304